




Remove the device

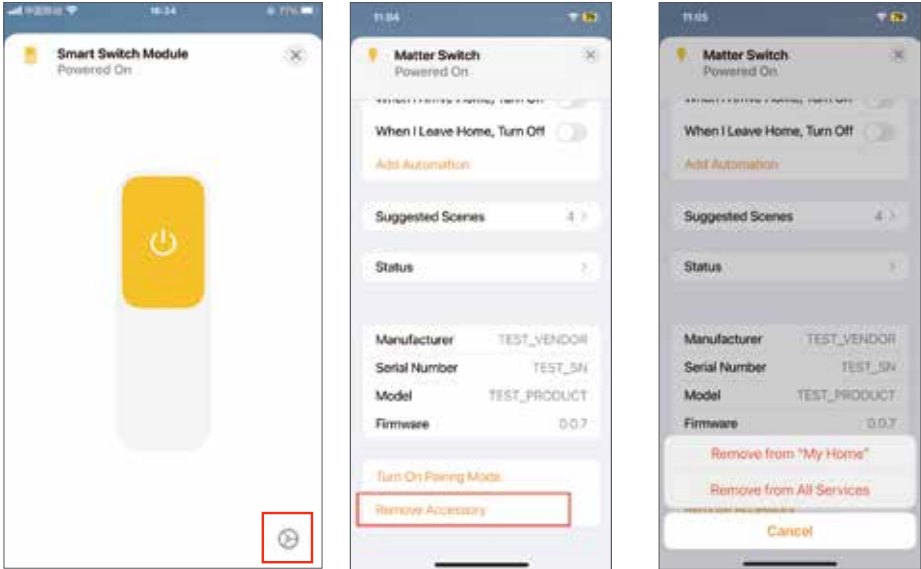

Product linkage

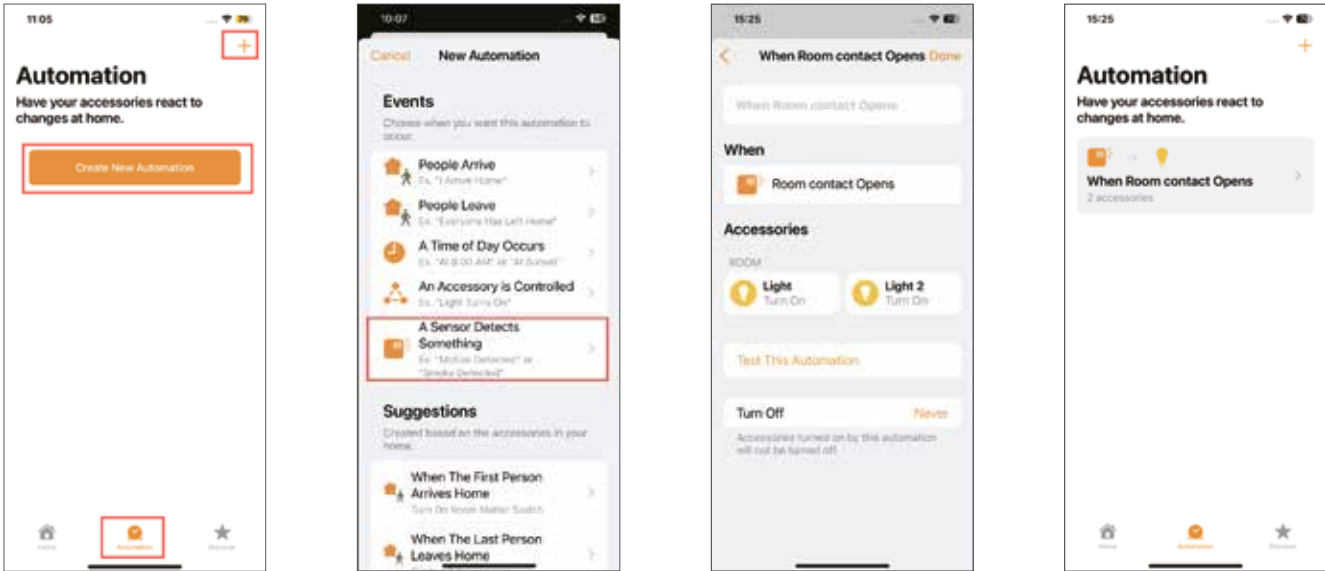

Share device

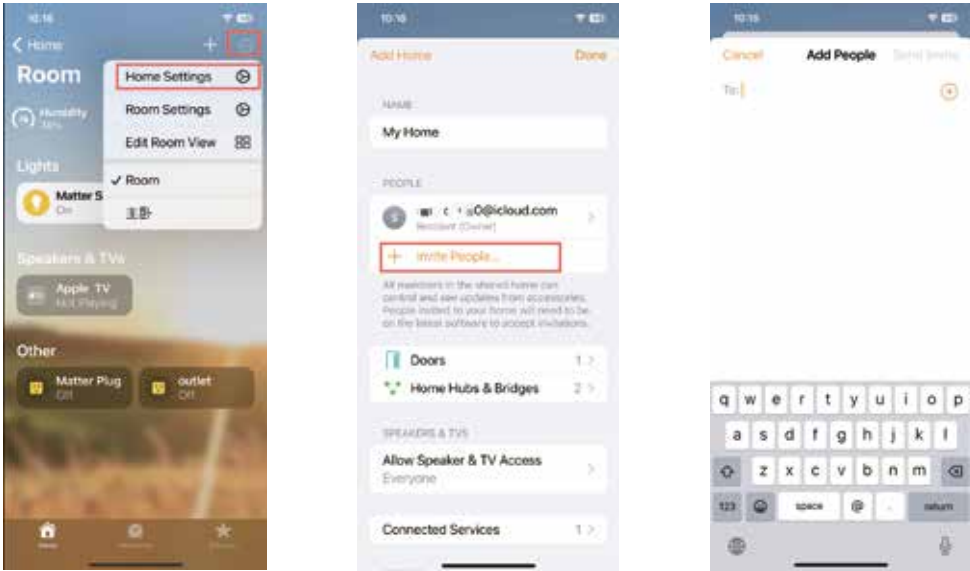

Art KDL552000
WIRED SMART SWITCH KIT for
 matter


Mosaic S.p.A.
Lungo Dora Colletta 113/9 - 10153 Torino - Italy

 TUTORIAL 

TECHNICAL SPECIFICATIONS

Product type	Matter Switch Module
Voltage	AC100-240V 50/60Hz
Max. load	1CH:16A 2CH:2X10A 3CH:3x5A
Operation frequency	2.412GHz-2.484GHz
Operation temp.	-10°C~+40°C
Protocol	WIFI IEEE 802.11b/g/n
Operation range	<100m
Dims (WxDxH)	39.2x39.2x18 mm
IP rating	IP20
Warranty	2years
Certificates	CE ROHS

- 1**
Installation must be carried out by a qualified electrician in accordance with local regulations.
- 2**
Keep the device out of reach of children.
- 3**
Keep the device away from water, damp or hot environment.
- 4**
Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted to abnormal operation of the device.
- 5**
Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
- 6**
Do NOT attempt to disassemble, repair or modify the device.

 **OFF**

CAUTION: Before starting turn OFF power at main circuit panel.
ATTENTION: Coupez l'alimentation avant del procéder a l'installation.
ADVERTENCIA: Antes de comenzar el montaje, cortar la luz en el cuadro general.


 **OFF**

Use a certified electrician to install / Faites appel à un électricien certifié pour installer
Utilice un electricista certificado para instalar

NOTE: If a wall switch is connected directly after the line cable, turning off the lamp will also cut off power to the Matter switch. Consequently, it will no longer be able to receive commands via voice or app. However, once the light is turned back on from the wall switch, the Matter switch will be powered again and resume normal operation.

ATTENTION: si l'interrupteur est directement connecté, en aval du câble d'alimentation, l'extinction de la lampe interrompt également l'alimentation de l'interrupteur Matter, qui ne pourra plus recevoir de commandes vocales ou via l'application. Une fois la lumière rallumée depuis l'interrupteur mural, l'interrupteur sera à nouveau alimenté et reprendra un fonctionnement normal.


NOTA: Si el interruptor está conectado directamente, aguas abajo del cable de línea, al apagar la luz también se cortará la alimentación del interruptor Matter, que ya no podrá recibir órdenes por voz o app. Una vez que se vuelva a encender la luz desde el interruptor de pared, el interruptor reanudará el suministro de energía y funcionará correctamente.




Reset Key

If, for any reason, there is no switch connected to the lamp, it is necessary to AVOID closing the ceiling rose and removing any ladder used for the installation because the only reset option for the Matter switch is through a button located on the switch itself, which must remain easily accessible. Close the ceiling rose and remove the ladder only when the installation has been successfully completed.

Se per qualsiasi motivo non è presente un interruttore collegato alla lampada, è necessario EVITARE di chiudere il rosone e ritirare un'eventuale scala utilizzata per l'installazione perché l'unica opzione di reset dello switch Matter è tramite un pulsante situato sullo switch stesso, che deve rimanere facilmente accessibile. Chiudere il rosone e togliere la scala solo quando l'installazione è andata a buon fine.

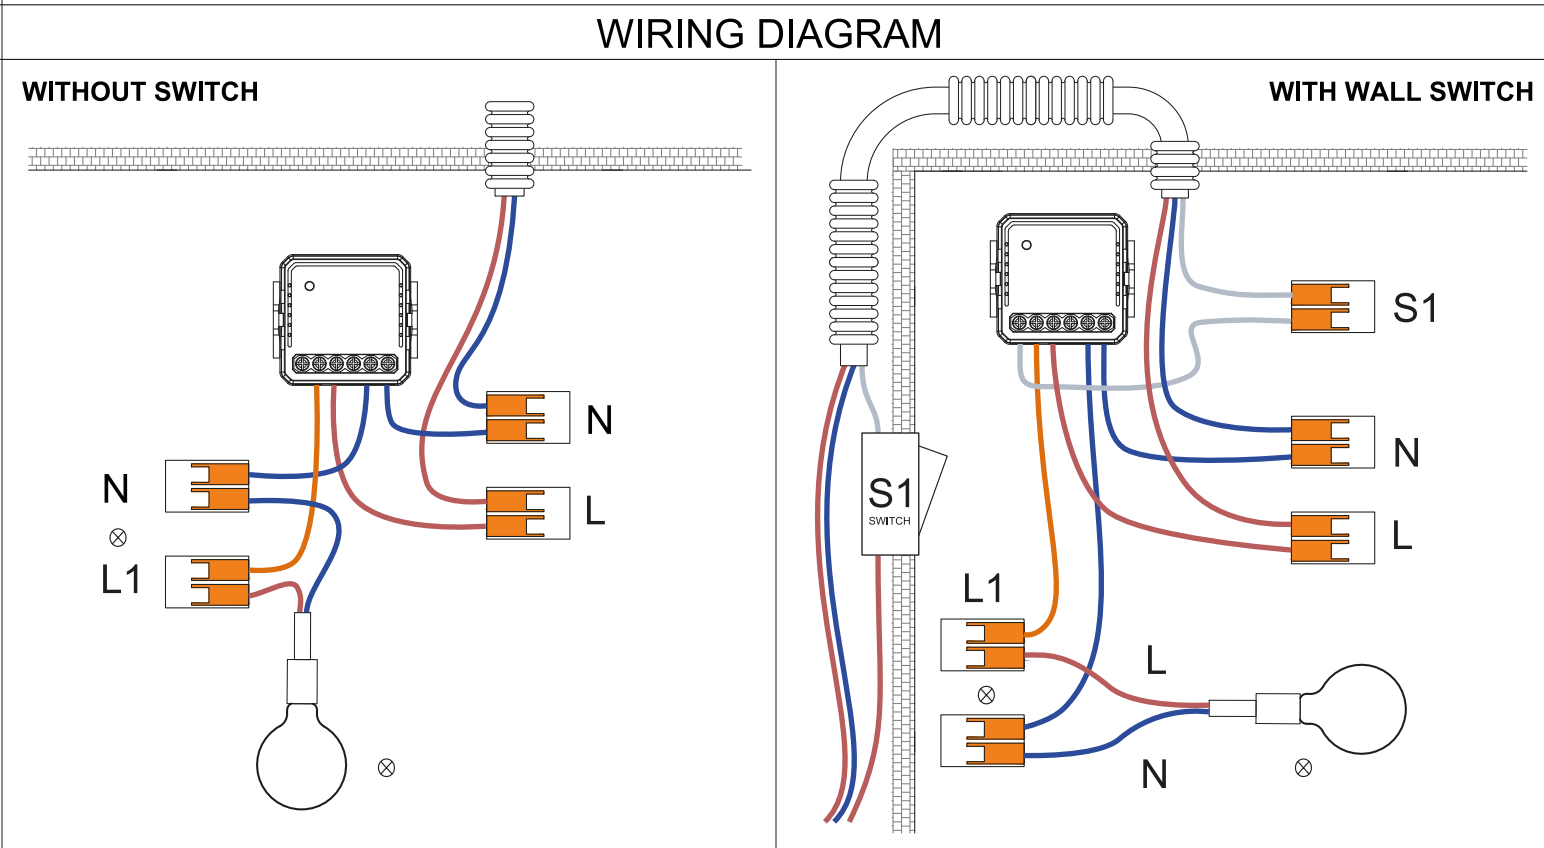

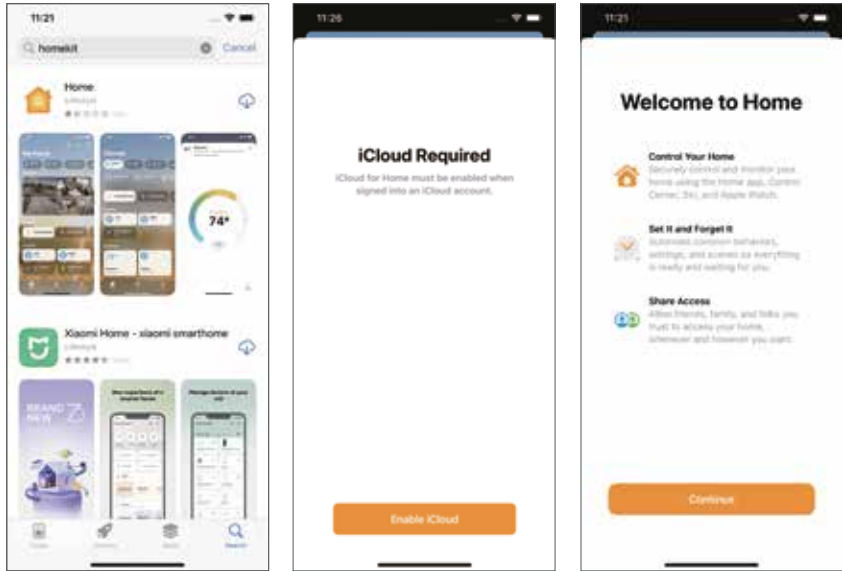


Home APP Instruction


- Pay attention:
- ① The mobile phone iOS system version must be 16.0 or later.
 - ② A home hub (such as HomePod, HomePod mini, Apple TV, or iPad) must be set up to add the Matter accessory to the home APP.
 - ③ The Wi-Fi configured when pairing must be in the LAN with the hub.

Download APP

- (1) Open the APP Store, search the "Homekit" and download the APP.
- (2) After the download, open the APP and log in using the local iCloud account.

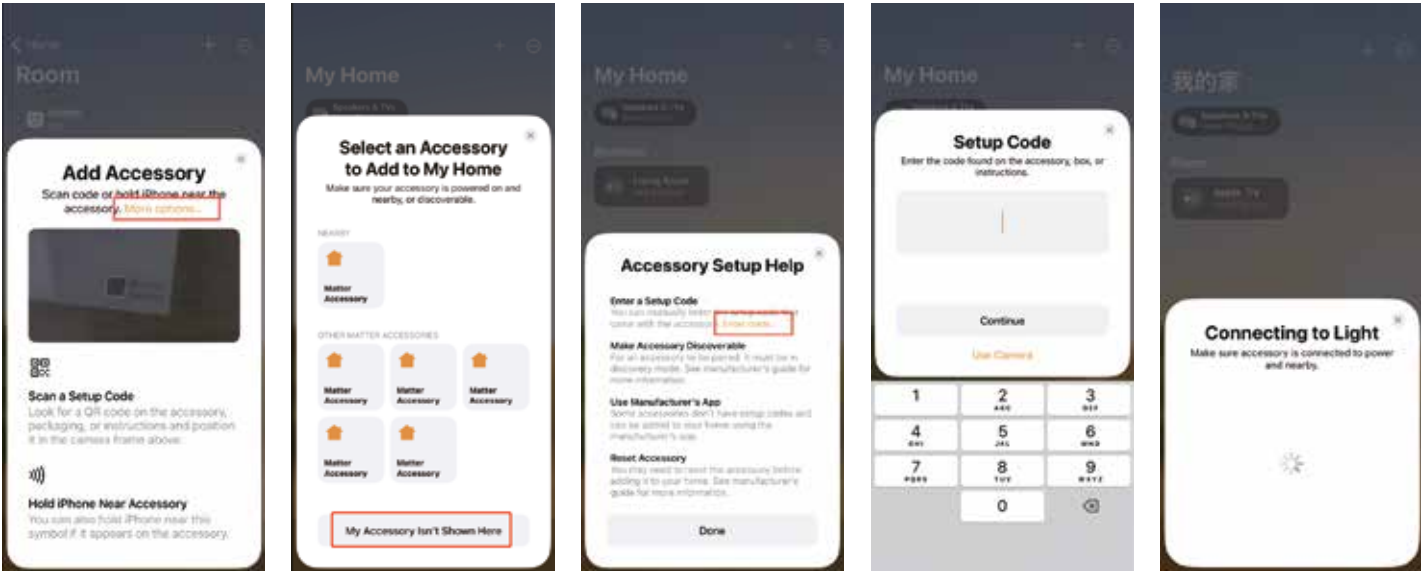


b.If no device is found, clicks "My Accessory Isn't Shown Here"

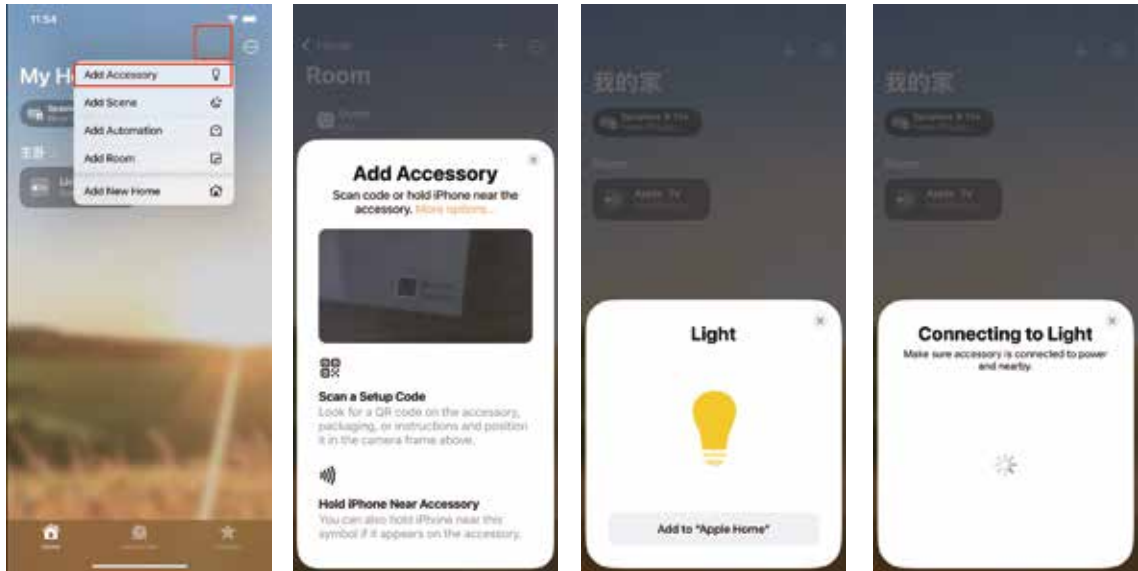

Add device


Be default, the device is in standby mode(the pairing indicator flashes); without the network status, please press the ON/OFF button for 5 seconds, and then add the device.
The Device only supports 2.4GHz Wi-Fi signal, need to use the home hub to add.

Scan the device QR code to add

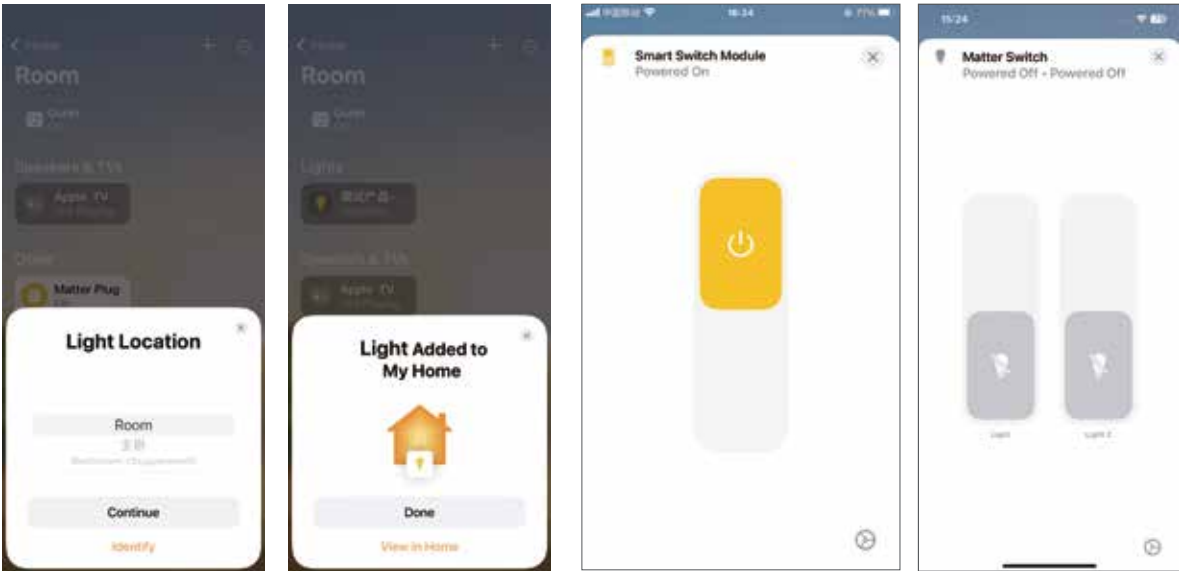

Add via Serial number

a, The APP automatically searches for the nearby devices, clicks the device icon, and input the serial number to add

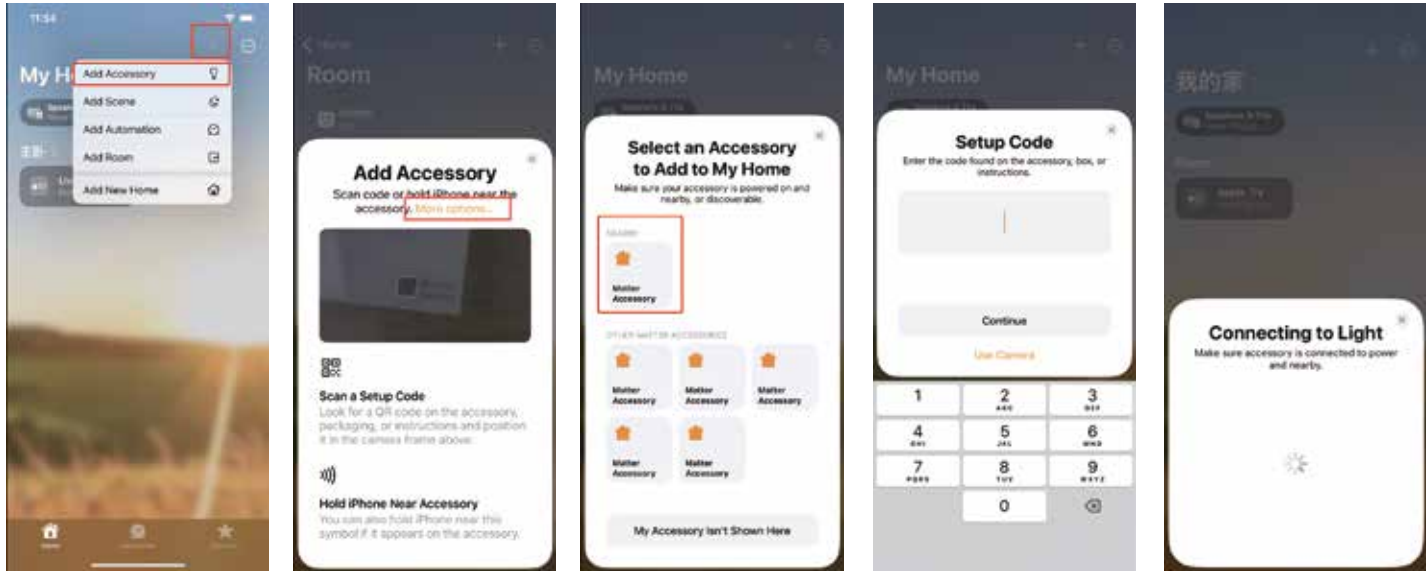

Function Settings

Modify the device name and the room location

